


Three-pieces COUPLING
三片式離合齒

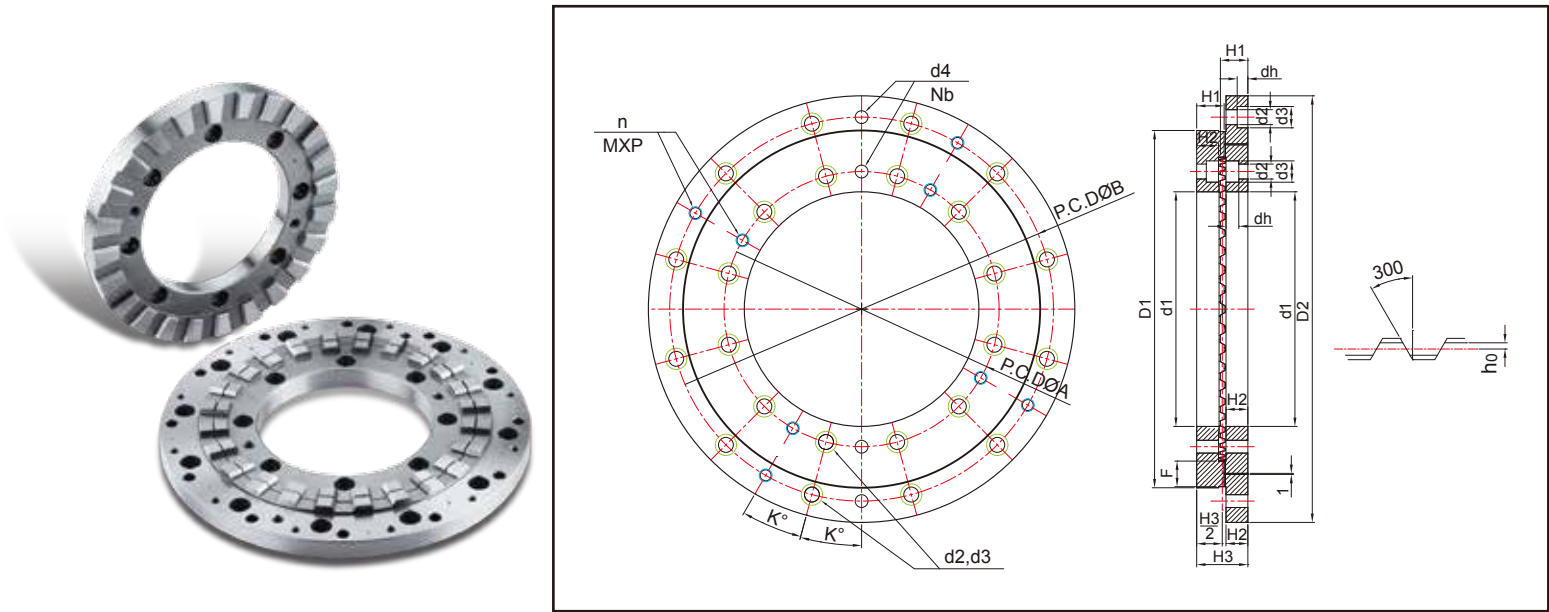

No.	型 號		外 徑	外 徑	內 徑	齒 數	齒 幅	齒 頂 厚 度	內 部 厚 度	齒 總 厚 度	固 定 螺 栓 孔					定 位 梢 孔				退 出 螺 栓 孔			有效節圓齒頂距	容許節圓齒頂距	
			D ₁	D ₂	d ₁	N	F	H ₁	H ₂	H ₃	N _a	P.C.D	d ₂	d ₃	d _h	N _b	P.C.D	K°	d ₄	n	P.C.D	MxP			h ₀
01	C24110-040	V ₁ X	110	-	40	24	14	16.75	11.5	30	6	60	6.6	11	6	2	60	30	8	2	60	M8x1.25	1.75	1.55	
		V ₀	-	170	-	24	-	16.75	11.5	30	8	140	9	14	8.5	2	140	22.5	8	2	140	M8x1.25	1.75	1.55	
02	C30110-040	V ₁ X	110	-	40	30	14	16.75	11.5	30	6	60	6.6	11	6	2	60	30	8	2	60	M8x1.25	1.75	1.55	
		V ₀	-	170	-	30	-	16.75	11.5	30	8	140	9	14	8.5	2	140	22.5	8	2	140	M8x1.25	1.75	1.55	
03	C24135-060	V ₁ X	135	-	60	24	18	18.75	13.5	34	6	80	6.6	11	6	2	80	30	8	2	80	M8x1.25	1.75	1.55	
		V ₀	-	175	-	24	-	18.75	13.5	34	8	150	9	14	8.5	2	150	22.5	8	2	150	M8x1.25	1.75	1.55	
04	C30135-060	V ₁ X	135	-	60	30	18	18.75	13.5	34	6	80	6.6	11	6	2	80	30	8	2	80	M8x1.25	1.75	1.55	
		V ₀	-	175	-	30	-	18.75	13.5	34	8	150	9	14	8.5	2	150	22.5	8	2	150	M8x1.25	1.75	1.55	
05	C24165-080	V ₁ X	165	-	80	24	20	20.75	15.5	38	6	100	6.6	11	6	2	100	30	8	2	100	M8x1.25	1.75	1.55	
		V ₀	-	220	-	24	-	20.75	15.5	38	8	195	11	17.5	10.5	2	195	22.5	10	2	195	M10x1.5	1.75	1.55	
06	C30165-080	V ₁ X	165	-	80	30	20	20.75	15.5	38	6	100	6.6	11	6	2	100	30	8	2	100	M8x1.25	1.75	1.55	
		V ₀	-	220	-	30	-	20.75	15.5	38	8	195	11	17.5	10.5	2	195	22.5	10	2	195	M10x1.5	1.75	1.55	
07	C24200-120	V ₁ X	200	-	120	24	20	21.75	16.5	40	8	140	9	14	8	2	140	22.5	8	2	140	M8x1.25	1.75	1.55	
		V ₀	-	255	-	24	-	21.75	16.5	40	10	222	11	17.5	10.5	2	222	18	10	2	222	M10x1.5	1.75	1.55	
08	C30200-120	V ₁ X	200	-	120	30	20	21.75	16.5	40	8	140	9	14	8	2	140	22.5	8	2	140	M8x1.25	1.75	1.55	
		V ₀	-	255	-	30	-	21.75	16.5	40	10	222	11	17.5	10.5	2	222	18	10	2	222	M10x1.5	1.75	1.55	
09	C24230-135	V ₁ X	230	-	135	24	22	21.75	16.5	40	12	165	9	14	8	2	165	15	8	2	165	M8x1.25	1.75	1.55	
		V ₀	-	290	-	24	-	21.75	16.5	40	12	258	11	17.5	10.5	2	258	15	12	2	258	M12x1.75	1.75	1.55	
10	C30230-135	V ₁ X	230	-	135	30	22	21.75	16.5	40	12	165	9	14	8	2	165	15	8	2	165	M8x1.25	1.75	1.55	
		V ₀	-	290	-	30	-	21.75	16.5	40	12	258	11	17.5	10.5	2	258	15	12	2	258	M12x1.75	1.75	1.55	

■ 本公司保留產品規格，尺寸，設計特性變更之權利，恕不另行通知。

No.	型 號		外 徑	外 徑	內 徑	齒 數	齒 幅	齒 頂 厚 度	內 部 厚 度	齒 總 厚 度	固 定 螺 栓 孔					定 位 梢 孔				退 出 螺 栓 孔			有效節圓齒頂距	容許節圓齒頂距	
												孔 數	P C D	孔 徑	上 徑	孔 徑 深	梢 孔 數	P C D	孔 角 度	外 徑	牙 孔 數	P C D			牙 規 格
			D ₁	D ₂	d ₁	N	F	H ₁	H ₂	H ₃	N _a	P.C.D	d ₂	d ₃	d _h	N _b	P.C.D	K°	d ₄	n	P.C.D	MxP			h ₀
11	C24270-160	V ₁ X	270	-	160	24	24	21.75	16.5	40	8	195	11	17.5	10	2	195	22.5	10	2	195	M10x1.5	1.75	1.55	
		V ₀	-	330	-	24	-	21.75	16.5	40	12	300	13	20	12.5	2	300	15	12	4	300	M12x1.75	1.75	1.55	
12	C30270-160	V ₁ X	270	-	160	30	24	21.75	16.5	40	8	195	11	17.5	10	2	195	22.5	10	2	195	M10x1.5	1.75	1.55	
		V ₀	-	330	-	30	-	21.75	16.5	40	12	300	13	20	12.5	2	300	15	12	4	300	M12x1.75	1.75	1.55	
13	C48335-220	V ₁ X	335	-	220	48	24	25.75	20.5	48	12	258	14	20	12	2	258	15	12	4	258	M12x1.75	1.75	1.55	
		V ₀	-	400	-	48	-	25.75	20.5	48	12	360	14	20	12.5	2	360	15	12	4	360	M12x1.75	1.75	1.55	
14	C60335-220	V ₁ X	335	-	220	60	24	25.75	20.5	48	12	258	14	20	12	2	258	15	12	4	258	M12x1.75	1.75	1.55	
		V ₀	-	400	-	60	-	25.75	20.5	48	12	360	14	20	12.5	2	360	15	12	4	360	M12x1.75	1.75	1.55	
15	C360335-220	V ₁ X	335	-	220	360	14	24.32	20.5	48	12	258	14	20	12	2	258	15	12	4	258	M12x1.75	0.32	0.27	
		V ₀	-	400	-	360	-	24.32	20.5	48	12	360	14	20	12.5	2	360	15	12	4	360	M12x1.75	0.32	0.27	
16	C48425-300	V ₁ X	425	-	300	48	28	26.75	21.5	50	12	335	14	20	12	2	335	15	12	4	335	M12x1.75	1.75	1.55	
		V ₀	-	482	-	48	-	26.75	21.5	50	12	450	14	20	12.5	2	450	15	12	4	450	M12x1.75	1.75	1.55	
17	C60425-300	V ₁ X	425	-	300	60	28	26.75	21.5	50	12	335	14	20	12	2	335	15	12	4	335	M12x1.75	1.75	1.55	
		V ₀	-	482	-	60	-	26.75	21.5	50	12	450	14	20	12.5	2	450	15	12	4	450	M12x1.75	1.75	1.55	
18	C360425-300	V ₁ X	425	-	300	360	20	25.42	21.5	50	12	335	14	20	12	2	335	15	12	4	335	M12x1.75	0.42	0.37	
		V ₀	-	482	-	360	-	25.42	21.5	50	12	450	14	20	12.5	2	450	15	12	4	450	M12x1.75	0.42	0.37	
19	C48540-415	V ₁ X	540	-	415	48	32	29.25	24	55	12	450	14	20	12	2	450	15	12	4	450	M12x1.75	1.75	1.55	
		V ₀	-	604	-	48	-	29.25	24	55	12	570	18	26	16.5	2	570	15	12	4	570	M12x1.75	1.75	1.55	
20	C60540-415	V ₁ X	540	-	415	60	32	29.25	24	55	12	450	14	20	12	2	450	15	12	4	450	M12x1.75	1.75	1.55	
		V ₀	-	604	-	60	-	29.25	24	55	12	570	18	26	16.5	2	570	15	12	4	570	M12x1.75	1.75	1.55	

No.	型 號		D ₁	D ₂	d ₁	N	F	H ₁	H ₂	H ₃	N _a	P.C.D	d ₂	d ₃	d _h	N _b	P.C.D	K°	d ₄	n	P.C.D	MxP	h ₀	±A
21	C360540-415	V ₁ X	540	-	415	360	24	28.06	24	55	12	450	14	20	12	2	450	15	12	4	450	M12x1.75	0.56	0.5
		V ₀	-	604	-	360	-	28.06	24	55	12	570	18	26	16.5	2	570	15	12	4	570	M12x1.75	0.56	0.58
22	C72630-490	V ₁ X	630	-	490	72	32	31.75	24	60	12	530	18	26	16	2	530	15	12	4	530	M12x1.75	1.75	1.55
		V ₀	-	700	-	72	-	31.75	24	60	18	660	18	26	16.5	2	660	10	12	4	660	M12x1.75	1.75	1.55
23	C360630-490	V ₁ X	630	-	490	360	28	30.67	24	60	12	530	18	26	16	2	530	15	12	4	530	M12x1.75	0.67	0.58
		V ₀	-	700	-	360	-	30.67	24	60	18	660	18	26	16.5	2	660	10	12	4	660	M12x1.75	0.67	0.58
24	C72820-670	V ₁ X	820	-	670	72	40	39.25	28.5	75	18	710	18	26	16	2	710	10	14	4	710	M12x1.75	1.75	1.35
		V ₀	-	890	-	72	-	39.25	28.5	75	18	850	18	26	16.5	2	850	10	14	4	850	M12x1.75	1.75	1.35
25	C360820-670	V ₁ X	820	-	670	360	34	38.39	28.5	75	18	710	18	26	16	2	710	10	14	4	710	M12x1.75	0.89	0.78
		V ₀₂	-	890	-	360	-	38.39	28.5	75	18	850	18	26	16.5	2	850	10	14	4	850	M12x1.75	0.89	0.78

■ 本公司保留產品規格，尺寸，設計特性變更之權利，恕不另行通知。